

CAB100 Cabinets for Data Collection in Cleanrooms & Industrial Settings



Features

- Measurement options include differential pressure and analog inputs for a variety of parameters. Analog inputs can be made intrinsically safe with a safety barrier or galvanic isolator
- Reporting via viewLinc is compliant with FDA, Annex 11, GxP, and GAMP
- Networking options include PoE and/or a multiport Ethernet adapter
- Large cabinets feature an integrated 24VDC / 2.5 Amp power supply. Small cabinets have the option of integrated power supply, or Power over Ethernet
- Cabinets are safety listed in USA and Canada

Easy Data Collection with Quality & Compliance

The CAB100 integrates Vaisala's world-class instruments for monitoring differential pressure and other parameters into a simple, pre-configured instrument panel. In combination with the Vaisala viewLinc Enterprise Server Software, the cabinet provides pre-installed real-time monitoring of your critical environments. Cabinets are configurable to your application requirements, with options for differential pressure transmitters, analog inputs for the connection of remote transmitters, and safety barriers to limit voltage in hazardous areas that require Intrinsically Safe devices. The CAB100 enables you to combine differential pressure and other transmitters with data loggers in a single enclosure for centralized monitoring and reliable alarming.

Configured for your Cleanroom

The CAB100 is designed to ensure regulatory compliance in multiple cleanroom applications, including: pharmaceutical, healthcare, biotechnology, medical device, aerospace, automotive, and semiconductor manufacturing. Select from two cabinet sizes: small and large. Small cabinets can contain up to four analog inputs which can also be intrinsically safe, or four differential pressure transmitters. Large cabinets can accommodate up to 12 differential

pressure transmitters and up to 32 analog input channels with intrinsically safe options.

Communication is achieved over Ethernet to the viewLinc server database. The CAB100 is an ideal solution for many monitoring applications, providing device protection, economy and serviceability.

The lockable metal enclosure protects the measurement instruments from tampering and accidental damage.

It is often impossible or impractical to run power or network cables to each desired point of measurement. With the CAB100 you can centralize and economize by running a single power and network cable to the cabinet to support numerous transmitters, while also reducing the number of network adapters needed.


Centralization of measurement devices also simplifies serviceability. With multiple transmitters and data loggers located together, regular maintenance activities like calibration are easy and efficient.

CAB100 Configuration Options

Cabinet size	Small	40 x 30 x 20 cm (15.75 x 11.81 x 7.87 in)
	Large	60 x 50 x 20 cm (23.62 x 19.69 x 7.87 in)
Power	Power supply	Within Cabinet: 24VDC / 2.5A To Cabinet: 110...240 VAC
	Power over Ethernet*	Power over Ethernet, w/ Loop Power, w/o Fan
Analog Channels	4 - 32 Channels	4...20mA
Safety Barrier	1 - 16 Pieces	1 Barrier per Channel
Galvanic Isolator	1 - 12 Pieces	1 Barrier per Channel
Differential Pressure	1 - 12 Pieces	± 60Pa or ± 0.25 in H ₂ O
Ethernet Communication	Large cabinet	Up to 2 Serial-to-Ethernet devices via RJ-45 (DIGI PortServer TS4)
	Small cabinet	Vaisala vNet Ethernet interface for DL series data loggers with PoE option via RJ-45 connector
Ethernet	Ethernet Switch	+4 PoE IEEE 802.3af/at
Standards	EN/IEC61326-1 (Basic electromagnetic environment)	EN55032 Class B IEC/UL/EN 61010-1 (IP54/Nema-3 rated; Safety listed in USA and Canada)

*Only with PDTs and small CAB100

The CAB100 supports internal differential pressure transmitters, analog inputs, and safety barriers or galvanic isolators.

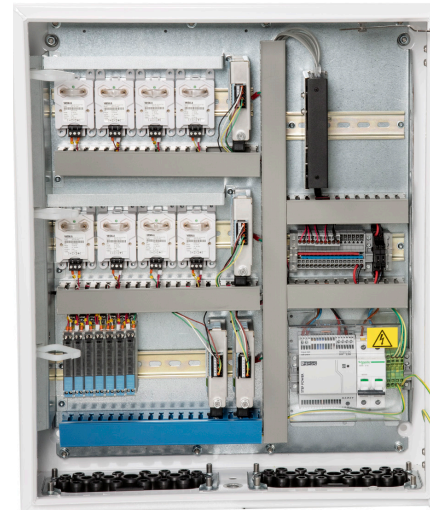

For Accuracy specifications, see devices on vaisala.com

- DL4000 data loggers for multiple parameters.
- PDT101 Differential pressure transmitter.
- HMT360 series transmitters for intrinsically safe temperature and humidity measurement
- HMT120/130 series transmitters analog inputs.



Please contact us at
www.vaisala.com/contactus



Scan the code for
more information

Ref. B211763EN-A ©Vaisala 2019
This material is subject to copyright protection, with all copyrights retained by Vaisala and its individual partners. All rights reserved. Any logos and/or product names are trademarks of Vaisala or its individual partners. The reproduction, transfer, distribution or storage of information contained in this brochure in any form without the prior written consent of Vaisala is strictly prohibited. All specifications — technical included — are subject to change without notice.

www.vaisala.com